




Reverse alarm SC-2T serve as an effective prevention against accidents involving reversing vehicles, especially trucks and buses. Intermittent alarm signal of high intensity sound warns, located in the danger zone for waning vehicle.

	Parameter				Unit
		min.		max.	
U_{CC}	Voltage	12		32	V
F_S	Frequency	2,5		3,5	kHz
F_{PR}	Interrupt frequency	2		4	Hz
P	Decibel		98		dB/m
t	Operating range	-40		85	°C

k

WARNING: THE DEVICE IS NOT PROVIDED against reverse polarity! It is necessary to observe the principle that involve red wire to the plus (+) terminal and the black wire to the minus (-) terminal.

Application information:

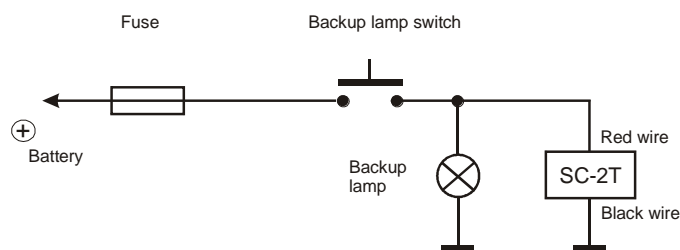

Technical drawing: alloy cover - black anodized, black plastic speaker

